

Redpost Charger/Interface



Redpost Charger/Interface

General product information

Pasteurization reduces the number of micro-organisms in beer and beverages which increases the product's shelf life. To maintain the quality of the product with regard to taste, smell, brightness, and color, pasteurization should be a gentle heat treatment. The most commonly used method of pasteurization makes use of a tunnel pasteurizer, through which containers, such as glass bottles and cans, travel while being sprayed with warm water. The effect of heat treatment in relation to time is expressed in pasteurization units (PUs).

The Redpost Charger/Interface, type RPC-80, charges the battery of the PU-Monitor and is equipped with a PC and printer interface. The printer interface enables direct printing and working stand-alone. The RPC-80 is compatible with all RPU-Monitors.


Principle of operation

After the pasteurization process is finished, the measurement stops and the PUs are immediately displayed on the PU-Monitor. When the monitor is connected to the RPC-80 charging begins automatically. The measured values can be directly printed and/or passed on to a PC via an interface. The RedLink software processes the measured values and displays them in tabular and graphical format, which can be printed and/or stored.



RPC-80

Redpost Charger/Interface

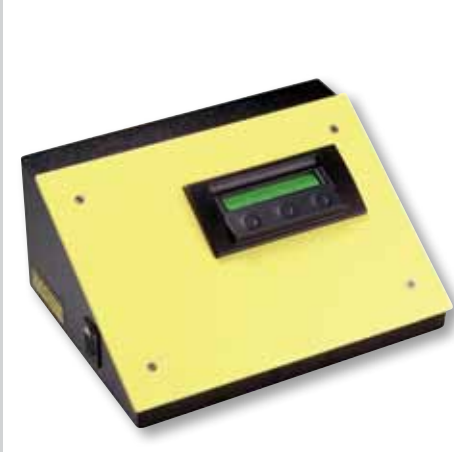

Benefits

- Stand-alone system (no PC required)
- Maintenance free

Application

- Tunnel pasteurizer
- In combination with all Redpost PU-Monitors

Technical Data

Charging time:	6 hr (for full charge at 300 series PU-Monitors)
Interfaces:	RS-232, USB for printing
Voltage:	100 - 240 V AC / 50-60 Hz

Dimensions:	310 x 240 x 150 (LxWxH mm)
Weight:	4.5 kg

Scope of Supply

- Redpost Charger/Interface, type RPC-80
- PU-Monitor connecting cable
- Mains cable (Euro, US, UK or AUS plug)
- RedLink software set (CD + Interface)
- Printer cable
- Instruction manual

Options

- Printer



Haffmans BV

P.O. Box 3150 NL-5902 RD Venlo • The Netherlands

T +31 77 323 23 00 • F +31 77 323 23 23

E info@haffmans.nl • I www.haffmans.nl

Please visit our website to obtain information about your local support.

Haffmans BV reserves the right to make changes in the technical specifications at any time.

RPC-80